

PRO-flex ACP 3000_1

Single Phase AC Current Probe

ACP3000_1_081003_07



The new PRO-flex ACP 3000_1 is an AC current probe utilizing the Rogowski principle. It can be used to measure currents up to 3000 A from very low frequencies to 10kHz.

The flexible and lightweight measuring head allows quick and easy installation in hard to reach areas and with large conductors.



Electrical Characteristics

Current Ranges	30A / 300A / 3000A AC RMS (selectable via rotary switch)
Output Sensitivity	50mV / 5mV / 0.5mV per A (AC coupled)
Accuracy (at 25°C)	± 1% of reading ± 0.1A (30A range) ± 1% of reading ± 1A (300A / 3000A range)
Load Impedance	100kΩ minimum
Linearity	± 0.2% of reading (10% to 100% of range)
Noise	80mA (30A) / 400mA (300A / 3000A range)
Bandwidth	10Hz to 10kHz (-1dB)
Phase Error	± <1° (45 – 65Hz)
Temperature Coefficient	± 0.08% of reading / °C
Position Sensitivity	± 2% of reading
External Field	± 0.2% of range (with cable > 100mm from the head)
Power Supply	2 x AA MN 1500 LR6 Alkaline low battery indicator external power supply (3V / 100mA)
Battery Life	2000 hours
Overload Indication	Red LED ON indicates the range overload
Working Voltage (see Safety Standards section)	1000V AC RMS or DC (Probe and Integrator) 30V max (Output)

General Characteristics

Probe and Cable Material	Alcryn 2070 NC LATENE 7H2W V0
Probe Cable Length	610mm (24") / 915mm (36") / 1220mm (48")
Probe Cable Diameter	9.9mm (nominal)
Cable Length	2m (Probe to Integrator box)
Output	0.5m long lead terminated with a safety male BNC
Operating Temperature Range	-20 to +65°C
Storage Temperature Range	-40 to +75°C
Operating Humidity	15% to 85% (non condensing)
Degree of protection	IP65 Probe, IP40 Integrator module
Colour	RAL 120 70 75 Lemon green

AUTHORIZED DISTRIBUTOR



POWERetc Corporation
Santa Clara, CA 95054
(408) 540-3199

www.poweretc.com
info@poweretc.com

Exclusive GMC-I PROSYS Distributor of Americas

PRO-flex ACP 3000_1

Single Phase AC Current Probe

ACP3000_1_081003_07



Safety Standards

- EN 61010-1:2001
- EN 61010-031:2002
- EN 61010-2-032:2002
- UL 610101, 2nd Edition, 2005-07-22
- CAN/CSA-22.2 No. 61010-1, 2nd Edition, 2004-07

1000 VRMS, Category III, 600 VRMS, Category IV, Pollution Degree 2
(Probe and Integrator)

Limitations Use of the probe on uninsulated conductors is limited to 1000 V AC RMS or DC and frequencies below 1 kHz.


Compliance ROHS and WEEE

Compatible Instruments

Dranetz Power Monitors PX5, PG4400, PV440, PP4300, PP1
Multimeters, Oscilloscopes, PQ Recording Devices Can be connected to most measuring instruments including multimeters, oscilloscopes PQ recording devices.
 [Note: most of these devices have 4mm banana jack inputs and would require a standard BNC-to-Double Banana adapter.]

Ordering Information

Part No.	Model
P-02.712.2	ACP 3000_1/24
P-02.712.3	ACP 3000_1/36
P-02.712.4	ACP 3000_1/48

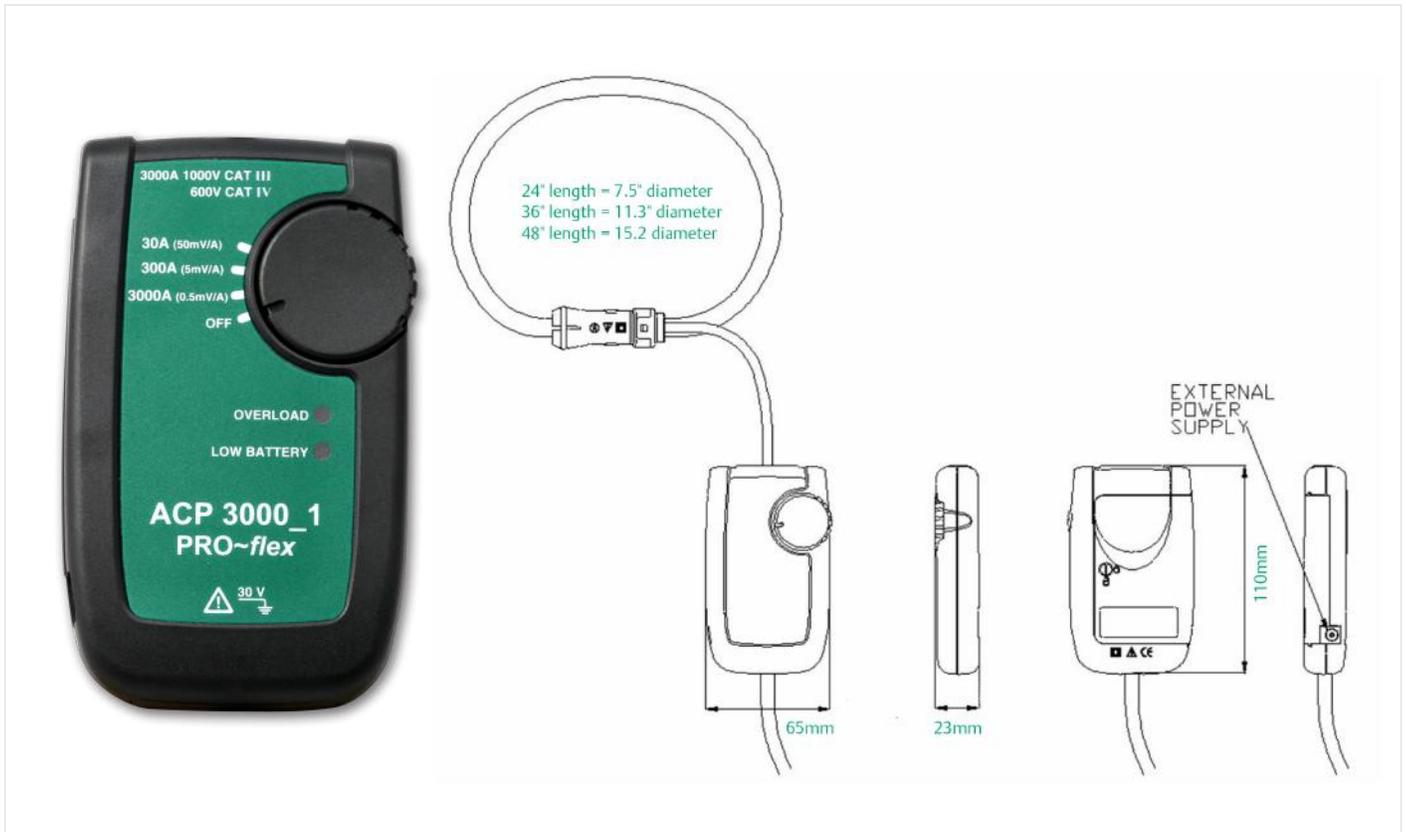

AUTHORIZED DISTRIBUTOR



POWERetc Corporation
 Santa Clara, CA 95054
 (408) 540-3199

www.poweretc.com
info@poweretc.com

Exclusive GMC-I PROSYS Distributor of Americas